


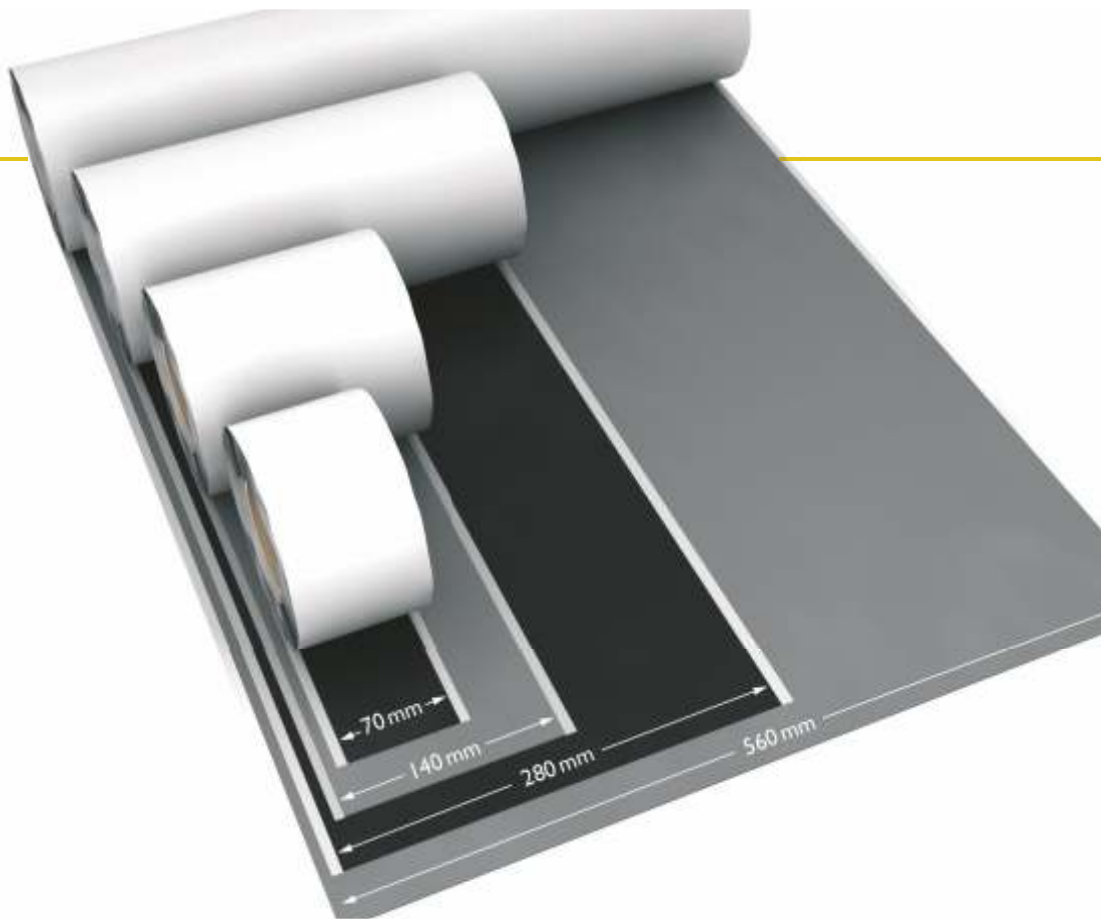

Product data:

Application:	Cladding / jacketing / sealing of HVAC ducts, pipes and technical insulations
Material:	High performace polymer (Polyisobutylene)
Widths:	70mm, 140mm, 280mm, 560mm
Length:	10 m per roll
Application temperature:	+5 °C up to +40 °C
Fire class:	E according to DIN EN 13501-1 (test procedure EN ISO 11925-2)
Connections:	By self-welding
Weight:	Ca. 1,85 kg/m² 1,31 kg/per 70mm roll 2,63 kg/per 140mm roll 10,50 kg/per 560mm roll
Thickness:	Ca. 1,05 mm
Stability (UV):	DIN 16726 (EN ISO 20811)
Water column:	> 7,5 m (EN ISO 20811)
Vapour permeability:	Sd > 400m; μ> 400,000 (DIN EN 1931)
Storage:	Dry up to +40 °C
Colours:	Anthracite, light-grey